



ISO 9001:2008  
REGISTERED



**15 Watts, Wall Plug-In, Switchmode Power Supply, N.A.,  
European, U.K., SAA Universal Input, ITE, Class II, Level V**

Part Number Ordering System (See Page 302)  
Output Plug/Cord Options (See Page 271)



**ELECTRICAL SPECIFICATIONS**

**INPUT VOLTAGE:**  
100-240 VAC

**INPUT CURRENT:**  
< 0.6 A RMS MAX

**INPUT FREQUENCY:**  
47 - 63 HZ

**OUTPUT CURRENT:**  
NO LOAD TO FULL LOAD, NO MINIMUM LOAD REQUIRED

**OUTPUT POWER (RATED):**  
15 WATTS MAX

**OUTPUT RIPPLE (PEAK TO PEAK):**  
100 mV

**OUTPUT REGULATION (LINE/LOAD):**  
± 5 % FOR MAIN OUTPUT, MEASURED AT O/P CONNECTOR

**LINE REGULATION:**  
± 1 % MAX AT FULL LOAD

**TURN ON/ TURN OFF OVERSHOOT:**  
4% MAX 500µS MAX RECOVERY TIME FOR 25% STEP LOAD

**TURN-ON DELAY:**  
3000 mSEC MAX

**HOLD-UP TIME:**  
16 m SEC MIN AT NOMINAL INPUT AND FULL LOAD

**INRUSH CURRENT:**  
30 A MAX AT COLD START 120 VAC, 60A MAX COLD START 230VAC

**SWITCHING FREQUENCY:**  
66.5 KHz TYPICAL

**OVER-VOLTAGE PROTECTION:**  
VOLTAGE LIMITED LESS 130% OF NOMINAL VOLTAGE

**OVER-CURRENT / SHORT CIRCUIT:**  
HICCUP WITH AUTO RECOVERY TO 1.1 - 1.3 I<sub>o</sub>

**OTHER PROTECTION:**  
INPUT FUSING

**SAFETY APPROVALS:**  
UL60950, CUL TO 22.2# 950, DEMKO TO EN60950-12001, AS/NZ 60950-1 CCC TO GB4943-2001, GB9254-1998, GB17625.1-2003, CE CLASS II, PSE TO J60950, AS/NZ 60950, CB REPORT, ARGENTINA S-MARK TO IEC 60950-1: 10/2001, TAIWAN BSMI TO CNS14336 (12v), SINGAPORE SPRING TO IEC60950-1:2001, VCCI

**DIELECTRIC WITHSTAND VOLTAGE:**  
3000VAC PRIMARY-SECONDARY

**LEAKAGE CURRENT:**

≤ 0.25 mA

**LINE SURGE:**  
EN 61000-4-5 LEVEL 4

**EMI:**  
COMPLIES WITH EN55022 CLASS B AND FCC PART 15 CLASS B WHEN TESTED WITH A RESISTIVE LOAD, BOTH CONDUCTED AND RADIATED.

**CE MARK:**  
TESTED TO COMPLY WITH EN61000-3-2 EN61000-3-3 AND EN50082-1, INCLUDING EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6, EN61000-4-11, LEVEL 4. UNIT IS ELIGIBLE FOR CE MARK.

**C-TICK:**  
TESTED TO COMPLY WITH RADIO TELECOMMUNICATIONS ACT OF 1992

**MTBF:**  
GREATER THAN 200,000 HOURS AT 25°C AMBIENT TEMPERATURE

**AMBIENT TEMPERATURE, OPERATING TEMPERATURE:**  
0° C TO 40° C

**STORAGE TEMPERATURE:**  
-40° C TO 80° C

**HUMIDITY:**  
0% TO 90% RELATIVE HUMIDITY

**MODEL NUMBER DESCRIPTION:**  
MODEL GT-41052-WWVV-X.X  
WHERE:  
41052: SERIES CODE  
WW = DENOTES RATED WATTAGE  
(VV) = RATED VOLTAGE  
(X.X) = DENOTES VOLTAGE DIFFERENTIATOR

**PART NUMBER DESIGNATION:**  
SEE P/N SYSTEM FOR EXPLANATION:  
XXX - DESIGNATION OUTPUT CORD + PLUG OPTION

- NOTES:**
1. EACH OUTPUT CURRENT MAY VARY WITHIN IT'S DESIGNATION RANGE, AS LONG AS OUTPUT POWER IS NOT EXCEEDED.
  2. SINGLE OUTPUT MAY VARY FROM 5VDC-24VDC IN 0.1V INCREMENTS
  3. (-Y.Y) OPTIONAL FOR SPECIFYING OUTPUT VOLTAGE DEVIATION FROM LISTED RATINGS. SUBTRACT Y.Y FROM RATED VOLTAGE.

**OUTPUT VOLTAGE / CURRENT:  
NORTH AMERICAN BLADE CONFIGURATION**

MODEL NUMBER	OUTPUT VOLTAGE (VDC)	OUTPUT CURRENT (A)	RATED OUTPUT POWER (W)
GT-41052-1305	+ 5.0	0 - 2.6	15
GT-41052-1506-X.X	+ 6.0	0 - 2.5	15
GT-41052-1507-X.X	+ 7.0	0 - 2.14	15
GT-41052-1509-X.X	+ 9.0	0 - 1.7	15
GT-41052-1512-X.X	+ 12.0	0 - 1.25	15
GT-41052-1515-1.2	+ 13.8	0 - 1.1	15
GT-41052-1515-X.X	+ 15.0	0 - 1.0	15
GT-41052-1518-X.X	+ 18.0	0 - 0.84	15
GT-41052-1520-X.X	+ 20.0	0 - 0.75	15
GT-41052-1524-X.X	+ 24.0	0 - 0.63	15
GT-41052-1548-22.0	+ 36.0	0 - 0.41	15
GT-41052-1548	+ 48.0	0 - 0.31	15

SPECIFICATIONS MAY CHANGE WITHOUT PRIOR NOTICE. CONSULT GLOBTEK CUSTOMER SERVICE FOR LATEST SPECIFICATIONS.

**15 Watts, Wall Plug-In, Switchmode Power Supply, N.A., European, U.K., SAA Universal Input, ITE, Class II, Level V**

Part Number Ordering System (See Page 302)  
Output Plug/Cord Options (See Page 271)




**ENCLOSURES**


HOUSING: HIGH IMPACT PLASTIC, 94V0 POLYCARBONATE, NON-VENTED, COLOR BLACK, COLOR BLACK, CUSTOMER SPECIFIED COLOR AVAILABLE UPON REQUEST.

STANDARD OPTION SHIPS WITHOUT AC PINS INSTALLED


SIZE:  
74 x 43.5 x 34 mm

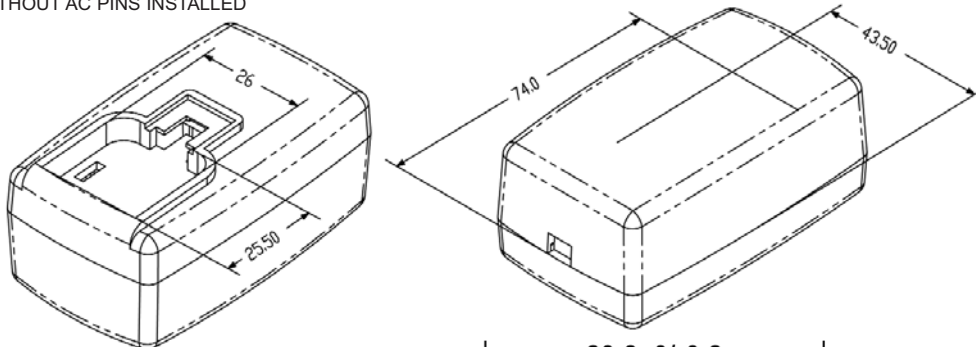


STANDARD OPTION, PINS TO BE ORDERED SEPARATELY

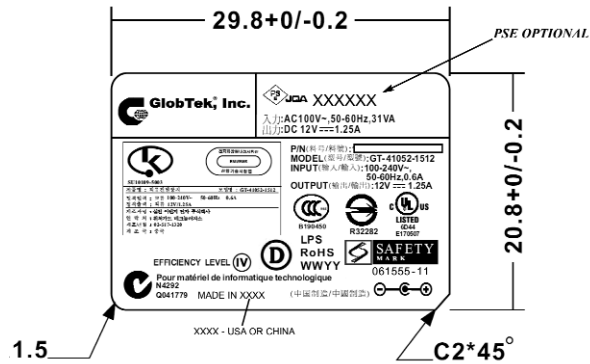


- INPUT CONNECTOR:**  
N.A. CONFIGURATION:  
1. CLASS II MODEL NEMA 1-15P JIS AC POWER RECEPTACLE WITH 2 PRONGS  
2. AUSTRALIAN CONFIGURATION:  
AS/NZ 3112 2 PINS CLASS II  
3. UK CONFIGURATION:  
BS 1363 2 PINS CLASS II  
4. EUROPEAN CONFIGURATION:  
EUROPLUG CEE 7/16 2 PINS, CLASS II




P/N: Q-NA  
NORTH AMERICA  
JAPAN  
CHINA




P/N: Q-SAA  
AUSTRALIA  
CHINA




P/N: Q-UK  
UNITED KINGDOM  
HONG KONG  
SINGAPORE



P/N: Q-EU  
EUROPE  
SOUTH AMERICA



P/N: Q-KR  
KOREA



P/N: Q-AR  
ARGENTINA

SPECIFICATIONS MAY CHANGE WITHOUT PRIOR NOTICE. CONSULT GLOBTEK CUSTOMER SERVICE FOR LATEST SPECIFICATIONS.